


# 6c-12-4-1

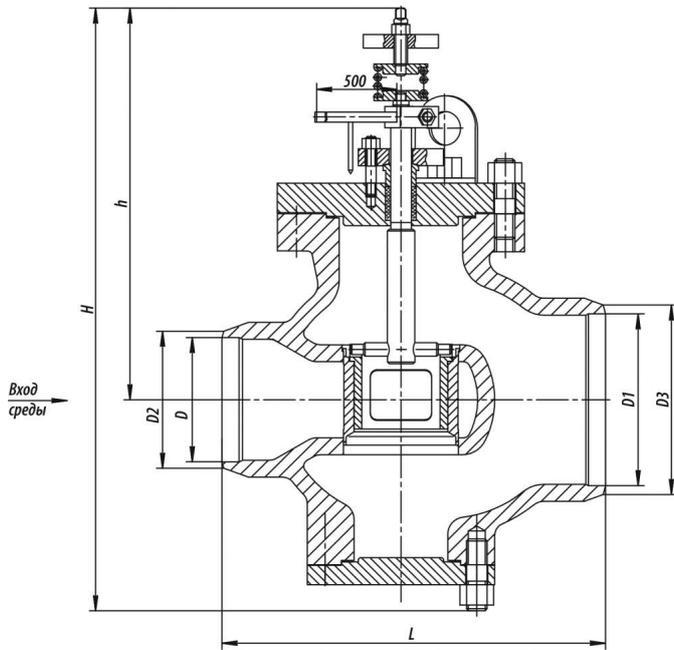

Production according to TR 3740-002-15365247-2004.

**Pipeline connection:** welded connection.

**Installation position:** on horizontal and vertical pipeline sections in the places convenient for maintenance and repair.

**Spindle position:**

- for the actuator of single-turn electric actuator type (MЭO) – horizontal and vertical position;
- for the actuator of single-turn electric flanged actuator type (MЭOФ) – vertical position with the actuator upwards.

**Working medium supply direction:** set according to the arrow drawn on the body.

**Climatic version:** У, УХЛ, ХЛ, Т according to GOST 15150-69.

**Placement category:** 1, 2, 3 according to GOST 15150-69.

## Specifications

DN, mm	PN, MPa	Tmax of the Medium, °C	Body Material, Steel	Working Medium	Max. Kv, m <sup>3</sup> /h	F, cm <sup>2</sup>	TQ, Nm, maximum torque at spindle plug	μ, not less than	Inlet/Outlet Diameter, mm	Full Stroke Rotation Number	Designation - display in a group	Designation - display in the product table	L, mm	Designation of the electric drive	N, kW	t <sub>о</sub> д, c.	H, mm	h, mm	D, mm	D1, mm	D2, mm	D3, mm	Weight without Electric Actuator, kg	Full Weight, kg	Updated	Torque, N*m
300	6,3	425	25Л	Пар	545,0	218,0	150	0,50	300/400	0,25	0	0	590	MЭO-250/25-0,25Y-99K	0,25	25	800	528	303	401	333	430	240	267,5	0	0

### Legend

**DN** - Nominal Diameter

**PN** - Nominal Pressure

**P** - Pressure

**Tmax** - Maximum

Design Temperature

**Мкр** - Spindle Torque

**t** - Response time

**μ** - Fluid Flow Coefficient

**h** - Valve Stroke

**Kv** - Throughput Capability

**F** - Seat Area

**ζ** - Resistance Coefficient

The valves of type 6c are intended for the control of the working medium flow or pressure.

The medium flow through the valve is controlled by means of changing the passage area, which is achieved when turning the spool with regard to the sleeve (seat). The maximum turning angle of the spool is 90°.

The controlled passage sections in the valve are performed in form of rectangular windows in the spool and seat.

The valves are not used as shutoff devices.

The control of the control valves of type 6c is carried out with the help of:

- a built-in electric actuator of single-turn electric flanged actuator type;
- an electric actuator of single-turn electric actuator type manufactured by ABS Automation, Cheboksary;
- built-in quarter-turn electric actuators SAR (AUMA) etc. or quarter-turn pneumatic actuators FESTO, VALBIA, Air Torque, ROTORK etc., chosen considering the working medium pressure and air pressure.

The allowed pressure differential is as follows:

- for superheated steam –  $\Delta P = P_p - 0,546 P_p$ ;
- for water – not more than  $\Delta P = 1,0$  MPa (10 kgf/cm<sup>2</sup>).

The throughput capability depending on the spool turning angle is shown in the diagrams.

According to GOST 356-80, the items designed for the ultimate pressure allow their application on operating parameters within the following range:

- at PN 100 MPa – from 10 MPa, 200 oC to 3,6 MPa, 455 oC;
- at PN 63 MPa – from 6,3 MPa, 200 oC to 2,3 MPa, 455 oC.

### **Page link:**

<https://en.bkzn.ru/catalog/armatura-reguliruyushhaya/klapany-reguliruyushhie-tipa-6s/6c-12-4-1/>