


1416-175-3-02

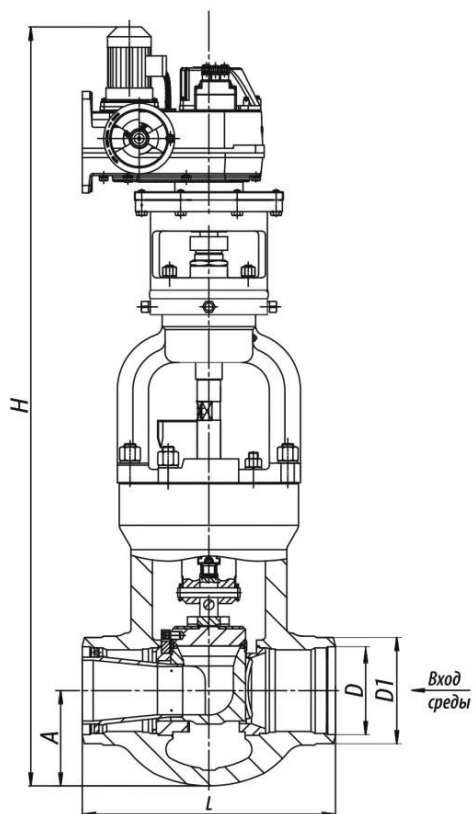

Specifications

DN, mm	Pp, MPa	Tmax of the Medium, °C	Body Material, Steel	Working Medium	Max. Kv, m³/h	Max. Pressure Differential, MPa	TQ, N·m, maximum torque at spindle plug	L, mm	Designation of the electric drive	N, kW	t хода, с.	H, mm	D, mm	D1, mm	A, mm	Weight without Electric Actuator, kg	Full Weight, kg	Torque, N·m
175	23,5	250	15ГЦ	Вода	77	17,6	1600	650	MЭО Ф-16 00/2 5-0,2 5Y-96 K	0,3	25	1797	182	230	231	652	727	0

Legend

- DN** - Nominal Diameter

PN - Nominal Pressure

P - Pressure
- Tmax** - Maximum Design Temperature

Мкp - Spindle Torque

t - Response time

μ - Fluid Flow Coefficient
- h** - Valve Stroke

Kv - Throughput Capability

F - Seat Area

ζ - Resistance Coefficient

Page link:

<https://en.bkzn.ru/catalog/armatura-reguliruyushhaya/klapany-razgruzhennye-1416/1416-175-e-02/>