


1416-225-P-03

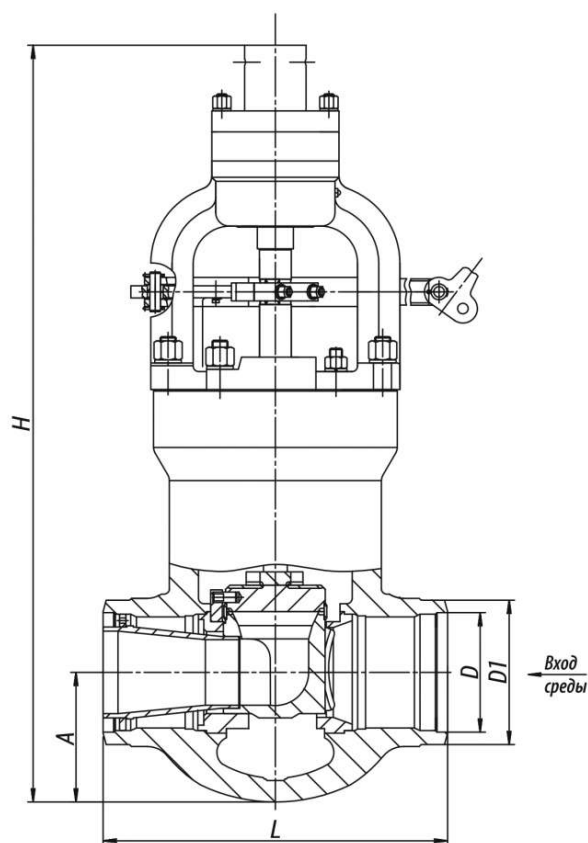

Specifications

DN, mm	Pp, MPa	Tmax of the Medium, °C	Body Material, Steel	Working Medium	Max. Kv, m³/h	Max. Pressure Differential, MPa	TQ, N·m, maximum torque at spindle plug	L, mm	Designation of the electric drive	N, kW	t хода, с.	H, mm	D, mm	D1, mm	A, mm	Weight without Electric Actuator, kg	Full Weight, kg	Torque, N·m
225	23,5	250	15ГЦ	Вода	77	17,6	1600	650	MЭ0-1600/25-0, 25Y-9 2K	0,49	25	1431	226	285	245	953	1088	0

Legend

DN - Nominal Diameter	Tmax - Maximum Design Temperature	h - Valve Stroke
PN - Nominal Pressure	Мкр - Spindle Torque	Kv - Throughput Capability
P - Pressure	t - Response time	F - Seat Area
	μ - Fluid Flow Coefficient	ζ - Resistance Coefficient

Page link:

<https://en.bkzn.ru/catalog/armatura-reguliruyushhaya/klapany-razgruzhennye-1416/1416-225-r-03/>